

Productsheet

CHAIN HOIST


250 / 500 / 1.000 / 2.000 KG

400 VOLT



LIFTINGGEAR-SHOP

ELECTRIC CHAIN HOIST MVK 250 - 2000 KG | 400 Volt

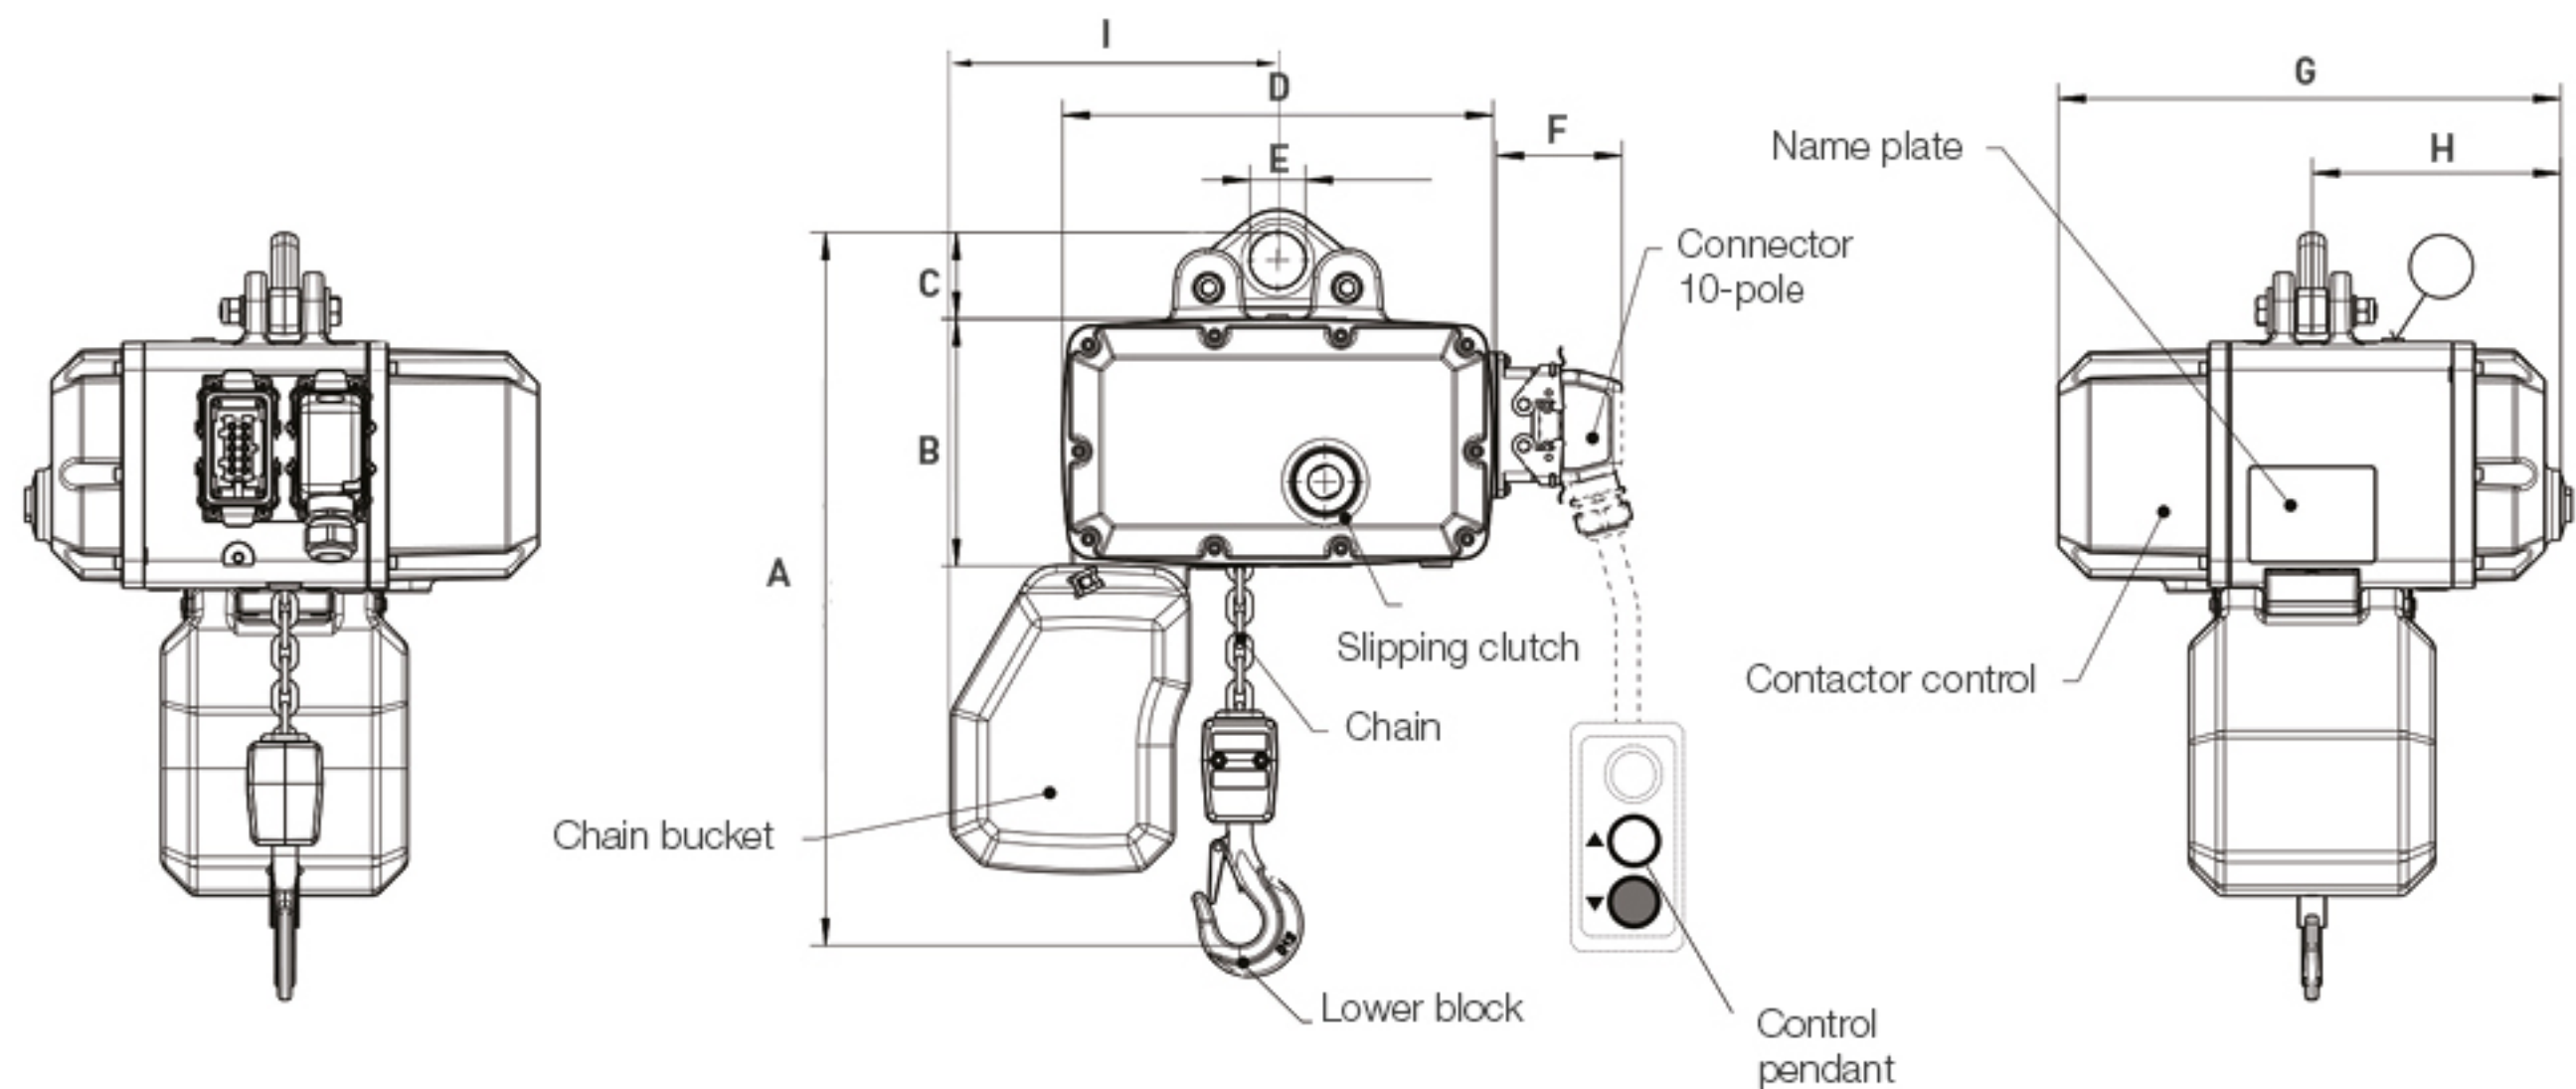

Type	WLL kg	Speed m/min	ED %	Power kW	Weight kg	A	B	C	D	E Ø	F	G	H	I
						mm								
MVK1 250.8	250	2/8	60%	0.09/0.36	30	367	160.5	56	280	36	82	326.5	161.5	220
MVK1 500.4	500	1/4	40%	0.18/0.75	31	400	160.5	56	280	36	82	326.5	161.5	220
MVK2 500.8	500	2/8	40%	0.18/0.75	31	400	160.5	56	280	36	82	326.5	161.5	220
MVK2 1000.4	1000	1/4	40%	0.18/0.75	33	480	160.5	56	280	36	82	326.5	178.5	220
MVK3 1000.8	1000	2/8	30%	0.45/1.90	51	480	180	76	311	51	82	374	178.5	260
MVK3 2000.4	2000	1/4	30%	0.45/1.90	54	480	180	76	311	51	82	374	178.5	260

Technical information

Protection class:	IP55
Voltage:	380 ~ 415 V
Frequency:	50 Hz
Control voltage:	24 V
Length operation cable:	1 meter shorter than the chain length

